


CLEVELAND

Double Column Machining Center MODEL: D2202

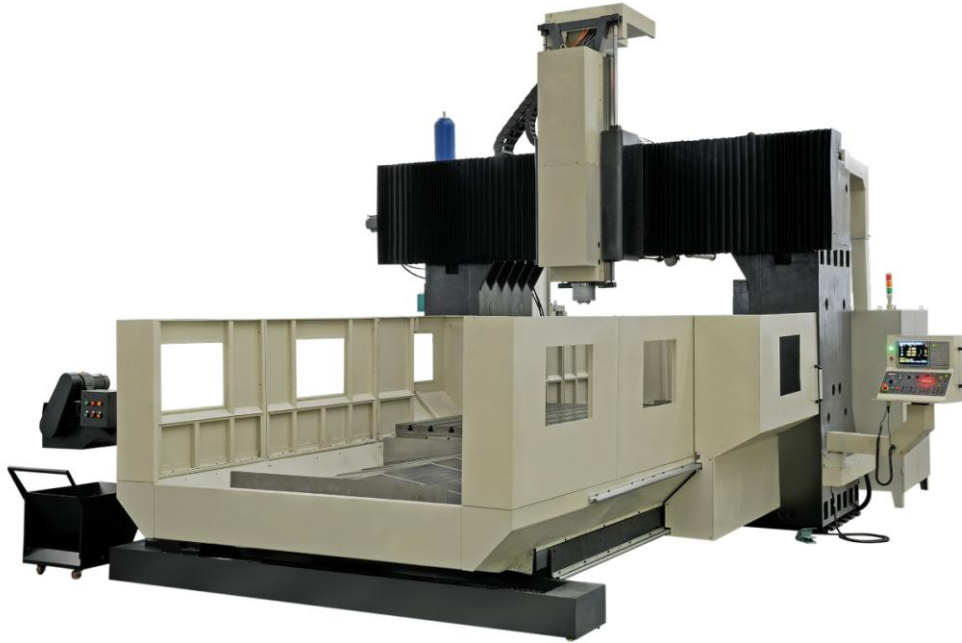

MACHINE FEATURES

- **FANUC CONTROL SYSTEM 21i-MB**
- **22HP Spindle Motor, BT50 Spindle Taper**
- **ATC 30 / 40 pcs (opt.)**
- **4,500 rpm spindle speed with spindle oil cooler**
- Roller linier guide way
- Double nut precision ball screws hardened & ground for high accuracy and long lasting
- FC30 Meehanite Casting main frame with annealed & stress relieved for long term reliability
- 100% Laser tested for positioning accuracy & repeatability
- Telescopic steel way covers on all three axes
- Extend head
- Coolant System and air blast system & Tool box & Tools
- Central lubrication system
- Built-in Quartz work light
- 90° angle milling head (manual) (opt.)
- Rigid tapping(opt.)

SPECIFICATIONS:

Table:	70" x 78.7" (1800 x 2000 mm)
Longitudinal travel (X-axis):	86" (2200 mm)
Cross travel:	86" (2200 mm)
Vertical travel:	39" (1000 mm)
Spindle nose to table top (D):	10"-49.2" (250-1,250 mm)
Load capacity:	11,000 lbs (5000 Kgs)
Spindle taper:	BT50
Spindle Speed (r. p.m.):	60-4500 rpm
Transmission of spindle & motor:	Belts
Spindle center to column front surface:	

Distant between columns:
T-Slot:

86" (2200mm)
9*0.86"*7" (9~22*180mm)

Feed Rate:

Rapid feed rate:
Cutting feed rate:

X/Y/Z: 472 ipm
1-393 ipm

Motor:

Spindle motor/max torque:
Feed motors on XYZ:
Coolant pump
Lubrication pump:
Power requirement:

22/ 18.5KW/30 min / continued
7/6/7 KW

50 KVA, 3 Phase 208-230 voltage

Automatic Tool Changer[Option]

No. of tools:
Max. tool diameter:
Max. tool length:
Max. tool weight:

32/40
4.9" (125 mm)
13.7"(350mm)
39 lb (18 Kg)

Length X Width X Height (LXWXH):
Net Weight:

77,185 lbs. (35000 Kgs)

STANDARD ACCESSORIES:

High pressure automatic lubrication system	Fully enclosed guarding	Screw type chip conveyor (on both side)
Chain type chip conveyor and chip tray	Coolant pump and water tank	Spindle coolant system
Z-axis oil pressure balance system	air blasting	Working lamp and Operation light
Automatic power off system	Electrical hand wheel	Precision inspect chart
RS-232 connector	Leveling screws and pads	Tool box, electric circuit diagram and manual

Additional Accessories information:

Power requirement	80 KVA, 3 Phase 208-230 voltage
Air requirement	90 - 100 psi
Type of oil for Way oil / oil chiller / pneumatic oil	Mobil Vactra #2 / Shell Tellus 32 / Air tool oil
Coolant capacity	

** WE RESERVE THE RIGHT TO CHANGE DESIGN, COLOR, SPECIFICATIONS, OR PRICE WITHOUT NOTICE **

CLEVELAND MACHINERY SALES INC.

**5000 BROOKPARK ROAD
CLEVELAND, OHIO 44134
WEBSITE: www.clevelandmachinery.com**

**PHONE: 216-741-8900
FAX: 216-741-8995
EMAIL: sales@clevelandmachinery.com**